Draft ETSI GS MEC 040 V3.1.4 (2023-03)



Multi-access Edge Computing (MEC); Federation enablement APIs

<u>Disclaimer:</u> This DRAFT is a working document of ETSI ISG MEC. It is provided for information only and is still under development within ETSI ISG MEC. ETSI and its Members accept no liability for any further use/implementation of this Specification.

Non-published MEC drafts stored in the "Open Area" are working documents, these may be updated, replaced, or removed at any time

Do not use as reference material.

Disclaimer

Do not cite this document other than as "work in
The present document has been produced and approved by the Multi-access Edge Computing (MEC) ETSI Industry
Specification Group (ISG) and represents the views of those members who participated in this ISG.

It does not necessarily represent the views of the entire ETSI membership.

Approved and published Specifications and reports for implementation of the MEC system shall be obtained via the ETSI Standards search page at:

http://www.etsi.org/standards-search

Reference DGS/MEC-0040FEDERATIONAPI Keywords API, Interworking, MEC, service

ETSI

650 Route des Lucioles F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B Association à but non lucratif enregistrée à la Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from: http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.

Information on the current status of this and other ETSI documents is available at https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services: https://portal.etsi.org/People/CommitteeSupportStaff.aspx

If you find a security vulnerability in the present document, please report it through our Coordinated Vulnerability Disclosure Program:

https://www.etsi.org/standards/coordinated-vulnerability-disclosure

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.

No recommendation as to products and services or vendors is made or should be implied.

No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.

In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

Reproduction is only permitted for the purpose of standardization work undertaken within ETSI.

The copyright and the foregoing restrictions extend to reproduction in all media.

© ETSI 2022. All rights reserved.

Contents

Intelle	ectual Property Rights	5
Forew	/ord	5
Moda	l verbs terminology	5
1	Scope	
_		
2	References	
2.1	Normative references	
2.2	Informative references	6
3	Definition of terms, symbols and abbreviations	7
3.1	Terms	
3.2	Symbols	
3.3	Abbreviations	
1	Overmina	0
4	Overview	
4.1 4.2	Introduction	
4.2	-	
5	Description of the services (informative)	
5.1	Federation enablement service introduction	9
5.2	Sequence diagrams	9
5.2.1	Introduction	9
5.2.2	Request/Response model	
5.2.2.1		
5.2.2.1		
5.2.2.1		
5.2.2.1		10
5.2.2.2		11
5.2.2.3 5.2.2.4		12
5.2.2.4 5.2.2.5		
5.2.2.5 5.2.2.5		
5.2.2.5 5.2.2.5		
5.2.2.5 5.2.2.5		
5.2.2.6 5.2.2.6		
5.2.2.7		10
0.2.2.	system of MEC federation	17
5.2.3	REST based subscribe-notify model	
5.2.3.1	·	
5.2.3.2	· · · · · · · · · · · · · · · · · · ·	
5.2.3.3		
5.2.3.4	Unsubscribing from federation event notifications	19
5.2.3.5		
5.2.3.6	Receiving MEC application instance registration/ registration update/ deregistration notifications	20
6	Data model	21
6.1	Introduction	
6.2	Resource data types	
6.2.1	Introduction.	
6.2.2	Type: SystemInfo	
6.2.3	Type: SystemInfoUpdate	
6.3	Subscription data types	
6.3.1	Introduction	
6.3.2	Type: SystemUpdateNotificationSubscription	
6.4	Notifications data types	
6.4.1	Introduction	22
6.4.2	Type: SystemUpdateNotification	
6.5	Referenced structured data types	22

6.5.1	Introduction	22
6.5.2	Type: TimeStamp	
7	API definition	22
7 7.1	Introduction	
7.1 7.2	Global definitions and resource structure	
7.2 7.3	Resource: A list of system_info	
7.3 7.3.1	Description	
7.3.1	Resource definition	
7.3.3	Resource methods	
7.3.3.1 7.3.3.1		
7.3.3.2		
7.3.3.3		
7.3.3.4		
7.3.3.5		
7.4	Resource: Individual system_info	
7.4.1	Description.	
7.4.2	Resource definition	27
7.4.3	Resource methods	27
7.4.3.	1 GET	27
7.4.3.2	2 PUT	28
7.4.3.3	3 PATCH	28
7.4.3.4	4 POST	29
7.4.3.5	5 DELETE	29
Anne	ex A (informative): Enabling MEC App providers to access MEC federation services	31
A.1	Introduction	31
Anne	x B (informative): Complementary material for API utilization	33
		2.4
Histo	ry	34

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: "Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards", which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECTTM, **PLUGTESTS**TM, **UMTS**TM and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP**TM and **LTE**TM are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M**TM logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**[®] and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Group Specification (GS) has been produced by ETSI Industry Specification Group (ISG) Multi-access Edge Computing (MEC).

Modal verbs terminology

In the present document "shall", "shall not", "should", "should not", "may", "need not", "will", "will not", "can" and "cannot" are to be interpreted as described in clause 3.2 of the <u>ETSI Drafting Rules</u> (Verbal forms for the expression of provisions).

"must" and "must not" are NOT allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document focuses on the functionalities enabled over the relevant reference points (i.e. Mfm and Mff) to support MEC federation. It describes the information flows, required information, and specifies the necessary operations, data models and API definitions. The present document carefully considers the relevant work of other industry bodies relating to MEC federation (e.g. GSMA OPG, 5GAA, etc.) and all relevant work done in ETSI.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found at https://docbox.etsi.org/Reference.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

[1] ETSI GS MEC 001: "Multi-access Edge Computing (MEC); Terminology".

[2] IETF RFC 5246: "The Transport Layer Security (TLS) Protocol Version 1.2".

NOTE: Available at https://tools.ietf.org/html/rfc5246.

[3] IETF RFC 8446: "The Transport Layer Security (TLS) Protocol Version 1.3".

NOTE: Available at https://tools.ietf.org/html/rfc8446.

[4] ETSI TS 133 210: "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); LTE; 5G; Network Domain Security (NDS); IP network layer security".

[5] GSMA Permanent Reference Document OPG.04: "Operator Platform – East-Westbound Interface APIs", v1.0, October 2022.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

[i.1] GSMA Permanent Reference Document: "Operator Platform Telco Edge Requirements", v1.0, Jun. 2021.

NOTE: Available at https://www.gsma.com/futurenetworks/wp-content/uploads/2021/06/OPG-Telco-Edge-Requirements-2021.pdf.

[i.2]	ETSI GR MEC 035: "Multi-access Edge Computing (MEC); Study on Inter-MEC systems and MEC-Cloud systems coordination".
[i.3]	ETSI GS MEC 002: "Multi-access Edge Computing (MEC); Phase 2: Use Cases and Requirements".
[i.4]	ETSI GS MEC 003: "Multi-access Edge Computing (MEC); Framework and Reference Architecture".
[i.5]	ETSI GS MEC 011: "Multi-access Edge Computing (MEC); Edge Platform Application Enablement".
[i.6]	ETSI GS MEC 010-2: "Multi-access Edge Computing (MEC); MEC Management; Part 2: Application lifecycle, rules and requirements management".
[i.7]	OpenAPI TM Specification.
NOTE:	Available at https://github.com/OAI/OpenAPI-Specification.
[i.8]	ETSI GS MEC 009: "Multi-access Edge Computing (MEC) General principles for MEC Service APIs".
[i.9]	IETF RFC 4122: "A Universally Unique IDentifier (UUID) URN Namespace".

3 Definition of terms, symbols and abbreviations



Available at https://tools.ietf.org/html/rfc4122.

Abbreviations 3.3

NOTE:

App CHF

For the purposes of the present document, the abbreviations given in ETSI GS MEC 001 [1] and the following apply:

-	
CR	Cloud Resources
E/WBI	East/West Bound Interface
GSMA	GSM Association
LADN	Local Area Data Network
LBO	Local Breakout
MEF	MEC Federator
MNO	Mobile Network Operator
NBI	NorthBound Interface
NR	Network Resources
OEM	Original Equipment Manufacturer
OP	Operator Platform
QoS	Quality-of-Service
SBI	SouthBound Interface
UNI	User Network Interface

Application

Charging Functions

4 Overview

4.1 Introduction

The present document specifies Federation enablement APIs that enable the shared usage of MEC services and applications across different systems (e.g. MEC system, Cloud system).

Clause 4 introduces the relevant work of other industry bodies e.g. GSMA OPG.

Clause 5 presents the reference scenarios for the MEC federation, and introduces the functionalities enabled via the relevant reference points (i.e. Mfm and Mff). It provides the high-level information flows and describes the necessary operations.

Clause 6 describes the data models that can be exchanged over the Federation enablement APIs, which provide detailed descriptions of all information elements used for MEC federation.

Clause 7 defines the actual Federation enablement APIs providing detailed information of how information elements are mapped into a RESTful API design.

4.2 GSMA Operator Platform and its interfaces

According to the GSMA Permanent Reference Document (PRD), "Operator Platform Telco Edge Requirements" [i.1], an Operator Platform (OP) is a facilitator of subscribers' seamless access to edge applications instantiated within a federation of edge networks involving multiple owners. Such seamless access is needed either when subscribers roam to visited networks or when a partner network is a better choice for edge application instantiation.

The objective of the OP concept is to guide the industry ecosystem, i.e. MNOs, vendors, OEMs and service providers towards shaping a common solution for the exposure of network capabilities. As an initial step, [i.1] provides both an end-to-end definition and requirements of the OP for the support of edge computing. In further details, the GSMA defines OP requirements as well as OP architecture and functional modules. Therefore, aim of GSMA is to engage with standardization and open source communities that will undertake the standard definition of the OP. As depicted in Figure 4.2-1, the following OP interfaces have been defined [i.1]:

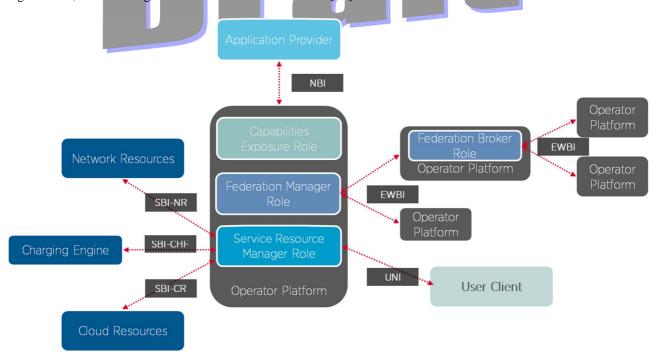


Figure 4.2-1: High-level OP reference architecture (source: [i.1])

• Northbound Interface (NBI);

- Southbound Interface (SBI); Cloud Resources (SBI-CR);
- Southbound Interface (SBI); Network Resources (SBI-NR);
- Southbound Interface (SBI); Charging Functions (SBI-CHF);
- User Network Interface (UNI);
- East/West Bound Interface (E/WBI).

5 Description of the services (informative)

5.1 Federation enablement service introduction

Federation enablement APIs offers services such as discovery, information exchange and application life cycle management to enable the inter-work of one MEC system with another MEC system. The related requirements were carefully studied and extracted from various use cases in ETSI GR MEC 035 [i.2] including V2X services scenario, multi-operator environment, Application instance transfer between a MEC system and a MEC/Cloud system, connecting different services, immersive AR game scenario, edge service delivery through visited network and edge node sharing.

The extracted requirements are listed as follows, summarized from ETSI GS MEC 002 [i.3].

- MEC system discovery ([Federation-02])
- MEC platform discovery ([Federation-03])
- Information exchange between MEC systems ([Federation-04])
- Information exchange between MEC platforms ([Federation-05])
- Support handling direct/indirect MEC system communication ([Federation-06])
- MEC application discovery ([Federation-07])
- MEC application on-boarding/instantiation ([Federation-08])
- Information exchange among MEC applications ([Federation-09])
- MEC service discovery ([Federation-10])

NOTE: Reusing the data models and APIs for MEC-Cloud coordination is considered if applicable, but its information flow is out of scope of the present document.

5.2 Sequence diagrams

5.2.1 Introduction

The rest of clause 5.2 introduces the following sequence diagrams based on the extracted requirements.

- Registration of MEC system(s) to the federation (clause 5.2.2.1)
- Discovery:
 - MEC system discovery (clause 5.2.2.2)
 - MEC application discovery (clause 5.2.2.3)
 - MEC service discovery (clause 5.2.2.4)
- Application package management and Application instance lifecycle management (clause 5.2.2.5)

- NOTE 1: Support handling direct/indirect MEC system communication is satisfied by MEC Federator as defined in ETSI GS MEC 003 [i.4].
- NOTE 2: The requirement for registration is based on the premise that multiple MEOs can register to a single MEF.

5.2.2 Request/Response model

5.2.2.1 Registration/Update/Deregistration of MEC system to the MEC federator

5.2.2.1.1 Registration

The registration information flow is used for enabling a MEO to register its MEC system information with a MEC Federator over Mfm reference point, as depicted in Figure 5.2.2.1.1-1.




Figure 5.2.2.1.1-1: Information flow of Registration

Registration procedure consists of the following steps:

- 1) The MEO sends a registration request to the MEC federator.
- 2) The MEC federator responds with a unique ID among federation members.

5.2.2.1.2 Update

Information flow of update of MEC system(s) to the federation is depicted in Figure 5.2.2.1.2-1.




Figure 5.2.2.1.2-1: Information flow of Update

Update procedure consists of the following steps:

- 1) The MEO sends an update request to MEC Federator.
- 3) MEC Federator returns an acknowledgement to MEO.

5.2.2.1.3 Deregistration

Information flow of deregistration of MEC system(s) from the federation is depicted in Figure 5.2.2.1.3-1.




Figure 5.2.2.1.3-1: Information flow of Deregistration

Deregistration procedure consists of the following steps:

- 1) The MEO sends an update request to MEC Federator.
- 2) MEC Federator returns an acknowledgement to MEO.

5.2.2.2 MEC system discovery

Information flow of MEC system discovery is used for enabling MEO to be aware of another MEC system. MEC system discovery is the primitive and essential procedure for enabling the other functionalities relating to Feature MECFederation. The information flow is depicted in Figure 5.2.2.2-1.

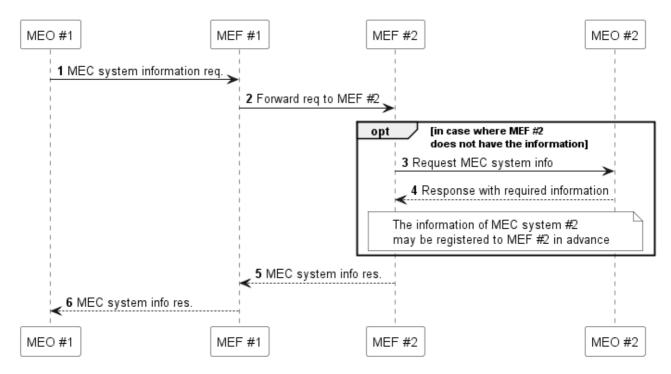


Figure 5.2.2.2-1: Information flow of MEC system discovery

As a prerequisite of this flow, MEC Federator Discovery is conducted among MEC Federators, which means MEC Federators are aware of each other in advance.

- 1) The MEO #1 sends a MEC system information request to MEC Federator #1 over Mfm reference point. This request is triggered by MEC platform or MEC Application instance.
- 2) MEC Federator #1 forwards the request to MEC Federator #2.
- 3) In case where MEC Federator #2 does not have the desired information (which means MEO #2 does not register its own information in advance), MEC Federator #2 sends a MEC system information request to MEO #2 over Mfm reference point.
- 4) MEO #2 responds with the information of its own system to MEC Federator #2.

- 5) MEC Federator #2 forwards the response to MEC Federator #1.
- 6) MEC Federator #1 forwards the response to MEO #1.

5.2.2.3 MEC application instance discovery

MEC application instance discovery refers to a process triggered by a MEC application instance, which discovers one or more MEC application instances in the MEC federation of the application from which it was instantiated. For example, the discovery may be based on information of a specific MEC application instance or of the corresponding application descriptor. This process is triggered, for instance, in the cases calling for MEC application instance-to-instance communication (e.g. neighbouring vehicles communicating with different MEC application instances may need to cooperate via those MEC application instances. grouped users communicating with different MEC application instances may need to communicate with each other via those MEC application instances, or grouped users may be gathered from different MEC systems and served by a single MEC application instance). The information flow is depicted in Figure 5.2.2.3-1.

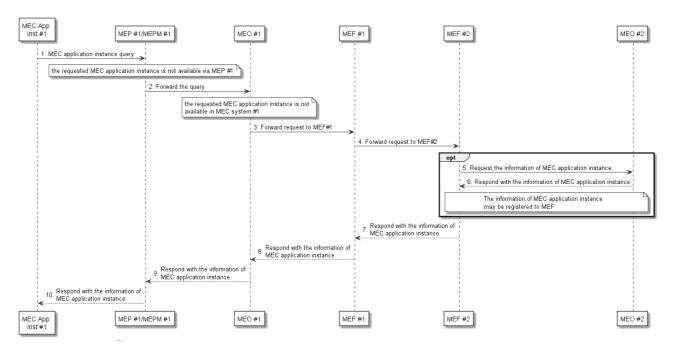


Figure 5.2.2.3-1: Information flow of MEC application discovery

Procedure of MEC application instance discovery consists of the following steps:

1) MEC application instance #1 sends a query to MEP #1 to discover a MEC application instance.

NOTE 1: MEC application instance #1 may know either the identifier of the requested application instance or identifier of application descriptor.

4) In the case where the desired MEC application instance is not available via MEP #1, MEP #1 forwards the query to MEO #1 via MEPM #1.

NOTE 2: How to handle the query between MEP #1 and MEO #1 is not further specified in the present document.

- 5) MEO #1 examines if the requested MEC application instance is available in MEC system #1. In case where the MEC application instance is not available in MEC system #1, MEO #1 forwards the query to MEF #1. Otherwise, go to step 9.
- 6) MEF #1 forwards the query to MEF #2.
- 7) If the information of MEC application instance, i.e. the list of active MEC application instances, is not registered to MEF #2, MEF #2 forwards the query to MEO #2.
- 8) MEO #2 responds with the information of MEC application instance(s). If no available MEC application is discovered, void would return.

- NOTE 3: In the case where multiple MEC application instances are found, the information of a list of MEC application instances is returned. In this case, the information of the MEC platform associated with each instance might be useful for the selection of MEC application instances. However, for security reasons, the information of MEC platform should be hidden between federated MEC systems. Based on the agreement among federated MEC systems, the information of MEC platform, e.g. available MEC services, can be included in the response.
- 9) MEF #2 responds with the information of MEC application instance(s) to MEF #1.
- 10) MEF #1 responds with the information of MEC application instance(s) to MEO #1.
- 11) MEO #1 responds with the information of MEC application instance(s) to MEP #1 via MEPM #1.
- 12) MEP #1 responds with the information of MEC application instance(s) to MEC application instance #1.

5.2.2.4 MEC service discovery

MEC service discovery in a MEC federation can be performed when a MEC system of the MEC federation wants to obtain MEC service availability. This process could be triggered in the case where the service consumer (e.g. a MEC application or a MEC platform of a MEC system the service discovery query originates from) needs the specific MEC service that is not available at the collocated MEC platform. The information flow is depicted in Figure 5.2.2.4-1.

NOTE 1: The desired MEC service could be provided by multiple MEC platforms. The service consumer that triggers the discovery may select one service instance.

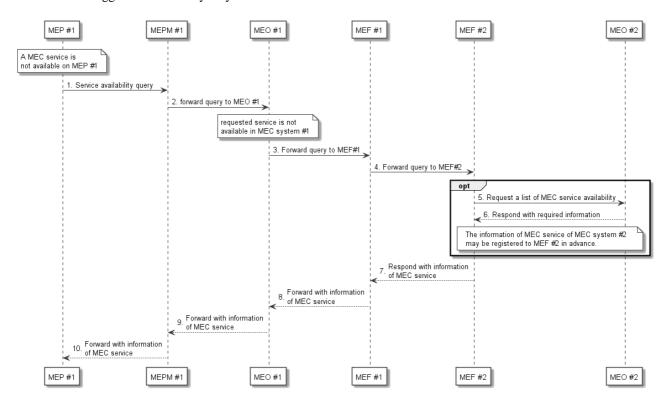


Figure 5.2.2.4-1: Information flow of MEC service discovery

Procedure of MEC service discovery consists of the following steps:

- MEP#1 sends a request to query the availability of a MEC service or a list of MEC services.
- 2) MEPM #1 forwards the query to MEO #1.

NOTE 2: How to handle the request between MEP, MEPM and MEO is not further specified in the present document.

- 13) MEO #1 examines if the requested service(s) are available in MEC system #1. In case where the service(s) are not available, MEO #1 forwards the query to MEF #1. Otherwise, MEO#1 responds with the information of MEC service(s) to MEPM #1.
- NOTE 3: The case where the requested service(s) are available in the MEC system is out of scope of the present document.
- 14) Subject to federation agreements and operator policies, MEF #1 forwards the query to MEF #2.
- 15) Optionally, MEF #2 forwards the query to MEO #2. Otherwise, go to step 7.
- NOTE 4: MEF is assumed to subscribe MEC service availability.
- NOTE 5: The case where MEF is not able to subscribe MEC service availability is not considered in the present document.
- 16) MEO #2 responds with the information of MEC service(s). If the requested MEC service(s) are not available in MEC system #2, MEO #2 returns void.
- NOTE 6: For security reasons, the information of the corresponding MEC platform information should be hidden between the federated MEC systems.
- 17) MEF #2 responds with the information of MEC service(s) to MEF #1.
- 18) MEF #1 forwards the information of MEC service(s) to MEO #1.
- 19) MEO #1 forwards the information of MEC service(s) to MEPM #1.
- 20) MEPM #1 forwards the information of MEC service(s) to MEP #1.

Editor's note: How to realize MEC service discovery using a pub/sub mechanism is FFS.

5.2.2.5 Application package management and Application instance lifecycle management

5.2.2.5.1 Introduction

The overall procedures for Application package management and Application instance lifecycle management follow clause 5.2 "Application management" and clause 5.3 "Application instance lifecycle management" in ETSI GS MEC 010-2 [i.6]. The difference is that all requests are forwarded to the external MEC system in the MEC federation through MEC federator with the information obtained in clauses 5.2.2.1 and 5.2.2.2. This clause describes onboarding an application package and application instantiation, and it can be assumed that the rest of other procedures are also supported through Mfm, Mff interface, and MEC federator, similar to those introduced here. These requests can be triggered at an entity (e.g. OSS) that is connected to application provider.

Editor's note: To merge with "MEC host discovery" will be handled.

Application package management:

- On-board application package.
- Query application package information.
- Disable application package.
- Enable application package.
- Delete application package.
- Fetch application package.

Application instance lifecycle management:

• Application instantiation.

- Application termination.
- Application operation.

5.2.2.5.2 On-boarding application package

The message flow of on-boarding application package is used to make application package available to the MEC system in the MEC federation. On-boarding request is triggered by Client (e.g. OSS) of MEC system #1 and forwarded to federated MEC system. The detailed description of this flow is depicted in Figure 5.2.2.5.2-1

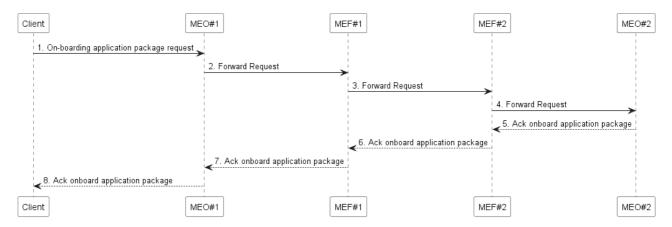


Figure 5.2.2.5.2-1: On-boarding application package in MEC federation

- 1) Client sends an on-boarding application package request to the MEO #1 with the information for MEC federation. The information may be based on the result of clause 5.2.2.2 MEC system discovery.
- 2) If information for MEC federation is included, MEO #1 forwards the request to MEC federator #1 and continues with the rest of the steps. Otherwise, follow the procedures of clause 5.2.2 in ETSI MEC 10-2.

Editor's note: Steps 1 & 2 will impact on ETSI MEC 010-2

- 3) MEC federator #1 forwards the request to MEC federator #2.
- 4) MEC federator #2 forwards the request to MEO #2 based on included MEC system information.
- 5) MEO #2 performs the actions described in step 1 of clause 5.2.2 of the ETSI MEC 10-2 [i.5] and MEC #2 returns an acknowledgement to MEC federator #2.
- 6-8) The acknowledgement is forwarded to Client via MEC federator #1 and MEO #1.

5.2.2.5.3 Application Instantiation

The message flow of application instantiation is used to instantiate an application instance in the MEC system.

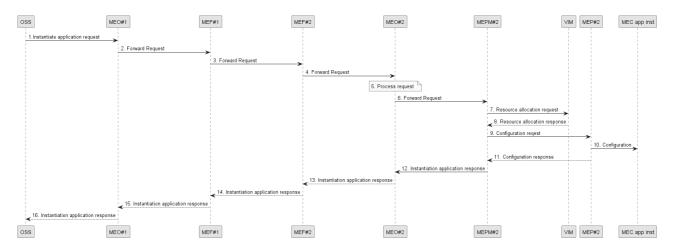


Figure 5.2.2.5.3-1: Application instantiation flow in MEC federation

- 1) Client sends an instantiate application request to the MEO #1 with the information for MEC federation. The information may be based on the result of clause 5.2.2.2 MEC system discovery.
- 2) If information for MEC federation is included, MEO #1 forwards the request to MEC federator #1 and continues with the rest of the steps. Otherwise, follow the procedures of clause 5.3.2 in ETSI MEC 10-2.

Editor's note: Steps 1 & 2 will impact on ETSI MEC 010-2.

- 3) MEC federator #1 forwards the request to MEC federator #2.
- 4) MEC federator#2 forwards the request to MEO #2.
- 5) MEO #2 checks the application instance configuration data, and authorizes the request and selects the MEC host (and corresponding MEC platform manager). If necessary, MEO #2 performs the actions described in step 3 of clause 5.3.1 of the ETSI MEC 10-2 [i.5].

Steps 6-12 follow the same procedures as described in steps 4-10 of clause 5.3.1 of the ESTI MEC 10-2 [i.5].

- 13) MEO #2 forwards the response to MEC federator#2 including the results of the instantiation operation and the application instance ID if there is.
- 14) The response is forwarded to Client through MEC federator #2 and MEC federator #1.

5.2.2.6 Providing MEC system-wide MEC application instance information updates to MEF

Figure 5.2.2.6-1 explains the procedure of providing MEC application instance information updates to the MEF within the MEC system. This procedure can be triggered by the instantiation of a MEC application or a new or updated MEC application instance registration.

Editor's note: It is FFS how MEO obtains the information of an MEC application instance registration to the MEC platform. The impacts, if any, on MEC 010-2 and MEC 011 may need to be address in separate contributions.

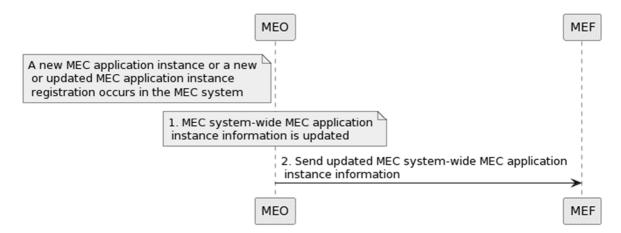


Figure 5.2.2.6-1: Information flow of providing MEC application instance information updates to MEF

The procedure of a MEO providing MEC system-wide MEC application instance information updates to MEF when, within the MEC system, there is a MEC application instantiation by the MEC system, or a MEC application instance registers with a MEC platform or updates its registration information, consists of the following steps:

- 1) MEC system-wide MEC application instance information is updated.
- 2) The MEO forwards the updated MEC system-wide MEC application instance information to the MEF.

Editor's note: It is FFS what MEC application instance information would be shared in the MEC federation Characterization of MEC system-wide MEC application instance information as MEC system-private is FFS.

Editor's note: It is FFS whether MEC application instance information masking is done in MEO, MEF, or elsewhere.

NOTE: The definition of specific authorization, communication periodicity and filtering policies, that are, instead, related to business agreements among federating entities, is outside the scope of the present document.

5.2.2.7 Forwarding MEC system-wide MEC application instance information updates to another MEC system of MEC federation

Figure 5.2.2.7-1 illustrates the inter-MEF communication needed within a MEC federation to share the permissible (e.g. per MEC system authorization policy) MEC system-wide MEC application instance information updates.



Figure 5.2.2.7-1: Information flow of providing permissible MEC system-wide MEC application instance information updates to another MEC system of the MEC federation

The procedure of forwarding MEC system-wide MEC application instance information updates to another MEC system of MEC federation consists of the following steps:

1) MEF 1 sends the updated MEC system-wide MEC application instance information to MEF 2.

Editor's note: .It is FFS what MEC application instance information would be shared in the MEC federation.

Characterization of MEC system-wide MEC application instance information as MEC system-private is FFS.

NOTE: The definition of specific authorization, communication periodicity and filtering policies, that are, instead, related to business agreements among federating entities, is outside the scope of the present document.

5.2.3 REST based subscribe-notify model

5.2.3.1 Subscribing to federation event notifications

To receive a notification of federation event, the Client creates a subscription to the event as depicted in Figure 5.2.3.1-1.

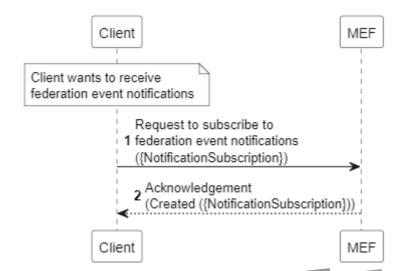


Figure 5.2.3.1-1: Information flow of subscribing to federation event notifications

Subscribing to federation event notification consists of the following steps.

When the Client wants to receive notifications about MEC federation event, it creates a subscription to federation event:

- 1) The Client sends a request for subscribing to federation event notifications. This request containing the {NotificationSubscription} data structure to the resource representing the federation subscription.
- 2) Upon success, the MEF generates a unique URI among other subscriptions, which can act as an identifier of subscription (subscriptionId), and returns an acknowledgment message including this URI to the Client.

Editor's note: The set of federation events needs to be specified.

5.2.3.2 Receiving notification on expiry of federation event subscription

An expiry time for a federation event subscription may be defined. In case expiry time is used, prior to the expiry, a notification is sent to the subscriber MEO. The scenario where the MEC Federator sends the notification is depicted in Figure 5.2.3.2-1.

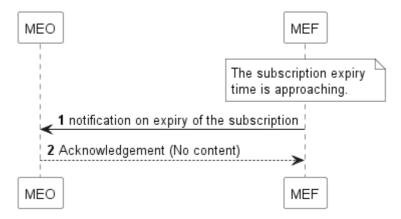


Figure 5.2.3.2-1: Information flow of receiving notification on expiry of federation event subscription

Receiving notification on expiry of federation event subscription consists of the following steps:

- 1) The MEC Federator sends a notification on expiry of the subscription when the subscription expiry time is approaching.
- 2) The MEO returns an acknowledgement to the MEC Federator.

5.2.3.3 Updating subscription for federation event notifications

Figure 5.2.3.3-1 presents the scenario where the MEO needs to update an existing subscription for federation event notification.

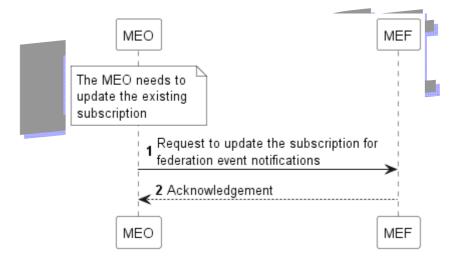


Figure 5.2.3.3-1: Information flow of updating subscription for federation event notifications

Updating subscription for federation event notification consists of the following steps:

- 1) The MEO sends a request for updating subscription for federation event notifications.
- 2) The MEC Federator returns an acknowledgement to the MEO.

5.2.3.4 Unsubscribing from federation event notifications

Figure 5.2.3.4-1 shows the scenario of deleting the subscription when the MEO does not want to receive federation event notification after subscribing to the event.

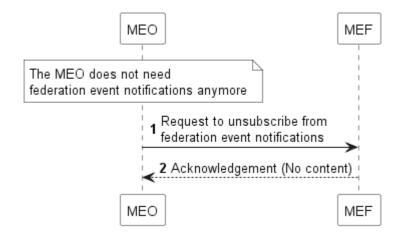


Figure 5.2.3.4-1: Information flow of unsubscribing from federation event notifications

Unsubscribing federation event notification consists of the following steps:

- 1) The MEO sends a request for unsubscribing from federation event notifications.
- 2) The MEC Federator returns an acknowledgement to the MEO.

5.2.3.5 Receiving MEC system registration/update notifications

Figure 5.2.3.5-1 presents the scenario of MEC system registration/update notification.

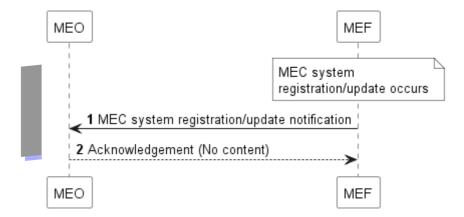


Figure 5.2.3.5-1: Information flow of receiving MEC system registration/update notification

Receiving MEC system registration/update notification consists of the following steps:

- 1) When MEC system registration/update occurs, the MEC Federator sends a notification of registration/update of other MEC system to the subscriber MEO.
- 2) The MEO returns an acknowledgement to MEC Federator.

5.2.3.6 Receiving MEC application instance registration/ registration update/ deregistration notifications

Figure 5.2.3.6-1 presents the scenario of MEC application registration/registration update/deregistration notifications.

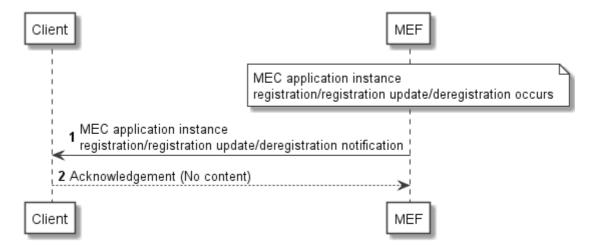


Figure 5.2.3.6-1: Information flow of receiving MEC application instance registration/registration update/deregistration notification

Receiving MEC application instance registration/registration update/deregistration notification consists of the following steps:

- 1) When MEC application instance registration/registration update/deregistration occurs, the MEF sends a notification of registration/registration update/deregistration of other MEC system to the subscriber Client.
- 2) The Client returns an acknowledgement to MEF.

Editor's note: How the Federator found out that an app instance has been registered/updated/deregistration is FFS.

5.2.4 Creation/Update/Removal of MEC federation between two partners

5.2.4.1 Introduction

These procedures provide key functionalities to establish MEC federation between two partners, which are based on the GSMA PRD OPG.04 [5] clause 2.2.1.

Basic functionalities include:

- Create MEC federation between partners;
- Update an already establish MEC federation between partners;
- Remove a MEC federation establishment between partners.

NOTE: In the present document, it is assumed the interaction takes place between the MEFs representing the MEC systems in the federation. MEF (MEC Federator) as defined in MEC003 [i.4] includes MEC Federation Broker (MEFB) and MEC Federation Manager (MEFM) functionalities.

5.2.4.2 Create MEC Federation between partners

The Create MEC Federation Operation is initiated by the Originating MEC system towards the Partner MEC system to establish a directed federation relationship between the two partners.




Figure 5.2.4.2-1: Information flow of Create MEC Federation

The message flow for creating a MEC federation relationship is as follows:

- 1) A MEC Federation create request is sent by the MEF A representing the originating MEC system to the MEF B representing the partner MEC system.
- 2) The MEF B sends a response to the MEF A to inform about the result of the operation.
- On success, a 200 OK message is sent.
- On failure, an appropriate error code is returned.

5.2.4.3 Update MEC Federation between partners

To make an update of a federation partnership the request initiator i.e., the Originating MEC system sends a message to partner OP to update modifiable parameters which were earlier exchanged during the create federation request flow.

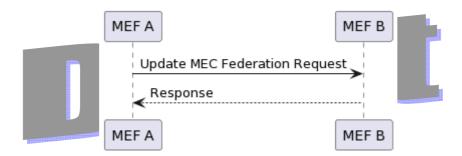


Figure 5.2.4.3-1: Information flow of Update

The message flow for updating a MEC federation relationship is as follows:

- A MEC Federation update request is sent by the MEF A representing the originating MEC system to the MEF B representing the partner MEC system.
- 2) The MEF B sends a response to the MEF A to inform about the result of the operation.
- On success, a 200 OK message is sent.
- On failure, an appropriate error code is returned.

5.2.4.4 Remove MEC Federation between partners

This procedure is intended to remove existing federation information within a partner MEC system. By Remove Federation Operation, the initiator MEC system sends a request to the partner MEC system to terminate the existing federation configuration.




Figure 5.2.4.4-1: Information flow of Deregistration

The message flow for removing an existing MEC federation relationship is as follows:

- 1) A MEC Federation remove request is sent by MEF A representing the originating MEC system to MEF B representing the partner MEC system.
- 2) The MEF B sends a response to the MEF A to inform about the result of the operation.
- On success, a 200 OK message is sent.
- On failure, an appropriate error code is returned.

6 Data model

6.1 Introduction

The following clauses define the data types common to the APIs specified in the present document.

6.2 Resource data types

6.2.1 Introduction

This clause defines data structures to be used in resource representations.

6.2.2 Type: SystemInfo

This type represents an information provided by the MEC orchestrator as a part of the "Registration of MEC system to the federation" introduced in clause 5.2.2.1.1.

The attributes of the SystemInfo shall follow the indications provided in Table 6.2.2-1.

Table 6.2.2-1: Attributes of SystemInfo

Attribute name	Data type	Cardinality	Description
systemId	String	1	Identifier of the MEC system. For the uniqueness of the identifier across the federated MEC systems, UUID format [i.9] is recommended.
			Shall be absent in POST request, and present otherwise.
systemName	String	1	The name of the MEC system. This is how the MEC system identifies other MEC systems
systemProvider	String	1	Provider of the MEC system.

6.2.3 Type: SystemInfoUpdate

This type represents an information provided by MEC orchestrator as a part of the "Update of MEC system(s) to the federation" introduced in clause 5.2.2.1.2.

Table 6.2.3-1: Attributes of SystemInfoUpdate

Attribute name	Data type	Cardinality	Description
systemName	String	01	The name of the MEC system. This is how the MEC
	-		system identifies other MEC systems
endpoint	EndPointInfo	01	Endpoint information (e.g. URI, FQDN, IP address) of
-			MEC federator.
NOTE: At least one	attribute shall exist.		

6.3 Subscription data types

6.3.1 Introduction

This clause defines data structures for subscriptions.

6.3.2 Type: SystemUpdateNotificationSubscription

This type represents a subscription to the notifications from the MEC federator related to information update of the MEC systems in the MEC federation.

The attributes of the SystemUpdateNotificationSubscription shall follow the indications provided in Table 6.3.2-1.

Table 6.3.2-1: Attributes of SystemUpdateNotificationSubscription

Attribute name	Data type	Cardinality	Description
subscriptionType	String	1	Shall be set to "SystemUpdateNotificationSubscription".
callbackReference	Uri	1	URI selected by the MEC orchestrator to receive notifications on
			the subscribed MEC system information updates in the MEC
			federation. This shall be included in both the request and the
			response.
_links	Structure	01	Object containing hyperlinks related to the resource. This shall
	(inlined)		only be included in the HTTP responses.
>self	LinkType	1	Self-referring URI. The URI shall be unique within the MEC
			Federation Enablement API as it acts as an ID for the
			subscription (SubscriptionId).
systemId	String	0N	Identifier(s) to uniquely specify the target MEC system(s) for the
			subscription. If absent, the subscription should include all MEC
			systems in the MEC federation.
expiryDeadline	TimeStamp	01	The expiration time of the subscription determined by the MEC
			Federation Enablement Service.

6.3.3 Type: SubscriptionLinkList

This type represents a list of links related to existing subscriptions for subscription service consumers of the MEC federation. This information is provided by the MEC federator when it receives a request to retrieve current subscriptions. The attributes of this data type shall follow the indications provided in Table 6.3.3-1.

Table 6.3.3-1: Attributes of SubscriptionLinkList

Attribute name	Data type	Cardinality	Description
_links	Structure (inlined)	1	List of hyperlinks related to the resource.
>self	LinkType	1	
>subscription	Array(Structure (inlined))	0N	A link to a subscription.
>>href	URI	1	The URI referring to the subscription.
>>subscriptionType	String	1	Type of the subscription. The string shall be set according to the "subscriptionType" attribute of the associated subscription data type event defined in clause 6.3.

6.4 Notifications data types

6.4.1 Introduction

This clause defines data structures that define notifications.

6.4.2 Type: SystemUpdateNotification

This type represents the information that the MEC federator notifies the subscribed MEC orchestrator about the information update of the MEC systems in the MEC federation.

The attributes of the SystemUpdateNotification shall follow the indications provided in Table 6.4.2-1.

Table 6.4.2-1: Attributes of SystemUpdateNotification

	MATERIAL PROPERTY AND ADMINISTRATION OF THE PROPERT					
Attribute name	Data type	Cardinality	Description			
notificationType	String	1	Shall be set to "SystemUpdateNotification".			
updatedSystemInfo	SystemInfo	1N	Updated information of the MEC system(s) in the MEC federation.			
_links	Structure (inlined)	1	Object containing hyperlinks related to the resource.			
>subscription	LinkType	1	A link to the related subscription.			

6.5 Referenced structured data types

6.5.1 Introduction

This clause defines data structures that are referenced from data structures defined in the previous clauses, but are neither resource representations nor bound to any pub/sub mechanism.

6.5.2 Type: TimeStamp

This type represents a time stamp.

Table 6.5.2-1: Attributes of the TimeStamp

Attribute name	Data type	Cardinality	Description
seconds	Uint32	1	The seconds part of the time. Time is defined as
			Unix-time since January 1, 1970, 00:00:00 UTC.
nanoSeconds	Uint32	1	The nanoseconds part of the time. Time is defined as
			Unix-time since January 1, 1970, 00:00:00 UTC.

7 API definition

7.1 Introduction

This clause defines the resources and operations of the MEC federation enablement APIs over the Mfm reference point.

7.2 Global definitions and resource structure

All resource URIs of this API shall have the following root:

{apiRoot}/{apiName}/{apiVersion}

"apiRoot" and "apiName" are discovered using the service registry. It includes the scheme ("https"), host and optional port, and an optional prefix string. The "apiName" shall be set to "fed_enablement" and "apiVersion" shall be set to "v1" for the current version of the present document. All resource URIs in the clauses below are defined relative to the above root URI.

The API shall support HTTP over TLS (also known as HTTPS) Using TLS version 1.2 (as defined by IETF RFC 5246 [2]). TLS 1.3 (including the new specific requirements for TLS 1.2 implementations) defined by IETF RFC 8446 [3] should be supported. HTTP without TLS shall not be used. Versions of TLS earlier than 1.2 shall neither be supported nor used.

TLS implementations should meet or exceed the security algorithm, key length and strength requirements specified in clause 6.2.3 (if TLS version 1.2 as defined by IETF RFC 5246 [2] is used) or clause 6.2.2 (if TLS version 1.3 as defined by IETF RFC 8446 [3] is used) of ETSI TS 133 210 [4] (3GPP Release 16 or later).

The content format of JSON shall be supported. The JSON format is signalled by the content type "application/json".

This API supports additional application-related error information to be provided in the HTTP response when an error occurs. See clause 6.15 of ETSI GS MEC 009 [i.8] for more information.

Figure 7.2-1 illustrates the resource URI structure of this API. Table 7.2-1 provides an overview of the resources defined by the present document, and the applicable HTTP methods.

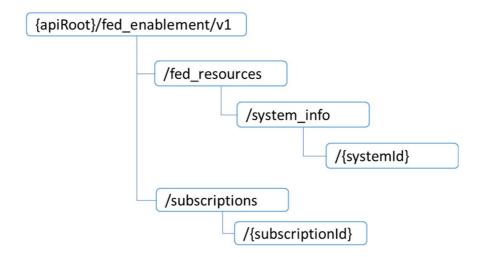


Figure 7.2-1: Resource URI structure of the Federation enablement API

Table 7.2-1: Overview of the resources and methods

Resource name	Resource URI	HTTP method	Meaning
A list of MEC system	/fed_resources/system_info	GET	Retrieve a list of system_info resources
information			(see clause 6 for data model) of federation
			members.
		POST	Create new system_info resource for a
			given MEC system.
Individual MEC	/fed_resources/system_info/	GET	Retrieve the system_info resource of the
system information	{systemId}		federation member with systemId as its
			system identifier.
			Update the system_info resource for a
			given MEC system.
			Delete the system_info resource for a
	# 174 2.7 2.7		given MEC system.

7.3 Resource: A list of system_info

7.3.1 Description

This resource can be used through the MEC system discovery sequence. See clause 5.2 for the details of the sequence.

7.3.2 Resource definition

Resource URI: {apiRoot}/fed_enablement/v1/fed_resources/system_info

This resource shall support the resource URI variables defined in Table 7.3.2-1.

Table 7.3.2-1: Resource URI variables for the resource

Name	Definition
apiRoot	See clause 7.2

7.3.3 Resource methods

7.3.3.1 GET

The GET method retrieves the information of a list of system_info resources of federation members. This method is typically used in the sequence of "MEC system discovery" as described in clause 5.2.2.2. The method shall comply with

the URI query parameters, request and response data structures, and response codes, as specified in Tables 7.3.3.1-1 and 7.3.3.1-2.

Table 7.3.3.1-1: URI query parameters supported by the GET method on this resource

Attribute name	Data type	Cardinality	Description
systemId	String	0N	Identifier of the MEC system.
systemName	String	0N	The name of the MEC system.
systemProvider	String	0N	Provider of the MEC system.
NOTE: One or more query parameter attributes may be provided, or none. If multiple query parameters exist, a list including MEC system information which match all query parameters will be returned. If none, a list including all MEC system information registered to the MEE will be returned.			

Table 7.3.3.1-2: Data structures supported by GET request/response on this resource

Request	Data type	Cardinality		Remarks
body	n/a			
	Data type	Cardinality	Response codes	Remarks
	SystemInfo	1N	200 OK	It is used to indicate that the query for retrieving system_info resource(s) is successful. Response body containing one or multiple system_info resources shall be returned.
	ProblemDetails	01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request.
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
Response body	ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
	ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource. More information shall be provided in the "detail"
				attribute of the "ProblemDetails" structure.
	ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI.
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.

7.3.3.2 PUT

Not supported.

7.3.3.3 PATCH

Not supported.

7.3.3.4 POST

The POST method creates the information of system_info resources to the MEC federator. This method is typically used in the sequence of "Registration of MEC system to the federation" as described in clause 5.2.2.1. The method shall comply with the URI query parameters, request and response data structures, and response codes, as specified in Tables 7.3.3.4-1 and 7.3.3.4-2.

Table 7.3.3.4-1: URI query parameters supported by the POST method on this resource

Attribute name	Data type	Cardinality	Description
n/a			

Table 7.3.3.4-2: Data structures supported by POST request/response on this resource

Request	Data type	Cardinality		Remarks
body	SystemInfo	1	Entity body in the re-	quest contains SystemInfo to be created. The
body			attribute "systemId" shall be absent.	
	Data type	Cardinality	Response	Remarks
			codes	
	SystemInfo	1	201 Created	It is used to indicate that the system_info resource is successfully created.
				The HTTP response includes a "Location" HTTP header that contains the URI of the created resource.
	ProblemDetails	01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request. In the returned ProblemDetails structure, the
				"detail" attribute should convey more information about the error.
Response body	ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials.
				In the returned ProblemDetails structure, the
	企业的经验			"detail" attribute should convey more information about the error.
	ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource.
				More information shall be provided in the "detail" attribute of the "ProblemDetails" structure.
	ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI.
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.

7.3.3.5 DELETE

Not supported.

7.4 Resource: Individual system_info

7.4.1 Description

This resource can be used for the Registration/Update/Deregistration sequence for manipulating the system_info resources. In addition, the system_info resource can also be queried through this resource in the MEC system discovery sequence. See clause 5.2 for the details of sequence.

7.4.2 Resource definition

Resource URI: {apiRoot}/fed_enablement/v1/fed_resources/system_info/{systemId}.

This resource shall support the resource URI variables defined in Table 7.4.2-1.

Table 7.4.2-1: Resource URI variables for the resource

Name	Definition
apiRoot	See clause 7.2
systemId	Identifier of MEC system.

7.4.3 Resource methods

7.4.3.1 GET

The GET method retrieves the system_info resource information. This method is typically used in the sequence of "MEC system discovery" as described in clause 5.2.2.2. The method shall comply with the URI query parameters, request and response data structures, and response codes, as specified in Tables 7.4.3.1-1 and 7.4.3.1-2.

Table 7.4.3.1-1: URI query parameters supported by the GET method on this resource

Attribute name	Data type	Cardinality	Description
n/a			THE RESIDENCE OF THE PARTY OF T

Table 7.4.3.1-2: Data structures supported by GET request/response on this resource

Request	Data type	Cardinality		Remarks
body	n/a			
	Data type	Cardinality	Response codes	Remarks
	SystemInfo	1	200 OK	It is used to indicate that the query for retrieving system_info resource is successful. Response body containing one system_info resource shall be returned.
	ProblemDetails	01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request.
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
Response body	ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials.
body				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
	ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource.
				More information shall be provided in the "detail" attribute of the "ProblemDetails" structure.
	ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI.
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.

7.4.3.2 PUT

Not supported.

7.4.3.3 PATCH

The PATCH method updates the information of system_info resources stored in the MEC federator through previous registration. This method is typically used in the sequence of "Update of MEC system to the federation" as described in clause 5.2.2.2. The method shall comply with the URI query parameters, request and response data structures, and response codes, as specified in Tables 7.4.3.3-1 and 7.4.3.3-2.

Table 7.4.3.3-1: URI query parameters supported by the PATCH method on this resource

Attribute name	Data type	Cardinality	Description
n/a			

Table 7.4.3.3-2: Data structures supported by PATCH request/response on this resource

Request	Data type	Cardinality		Remarks
body	SystemInfoUpdate	1	It contains attrib	utes to be update.
	Data type	Cardinality	Response codes	Remarks
	SystemInfo	1	200 OK	It is used to indicate that the system_info resource is successfully updated.
	ProblemDetails	01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request.
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
	ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials.
Response body				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
	ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource.
				More information shall be provided in the "detail" attribute of the "ProblemDetails" structure.
	ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI.
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.

7.4.3.4

Not supported.

7.4.3.5 DELETE

POST

The DELETE method deletes the information of system_info resources stored in the MEF. This method is typically used in the sequence of "Deregistration of MEC system to the federation" as described in clause 5.2.2.1.1. The method shall comply with the URI query parameters, request and response data structures, and response codes, as specified in Tables 7.4.3.5-1 and 7.4.3.5-2.

Table 7.4.3.5-1: URI query parameters supported by the DELETE method on this resource

Attribute name	Data type	Cardinality	Description
n/a			

Table 7.4.3.5-2: Data structures supported by DELETE request/response on this resource

Request	Data type	Cardinality		Remarks
body	n/a			
	Data type	Cardinality	Response codes	Remarks
	n/a		204 No Content	The operation has been successful. The response body shall be empty.
	ProblemDetails	01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request.
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
	ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials.
Response body				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
	ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource.
				More information shall be provided in the "detail" attribute of the "ProblemDetails" structure.
	ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI.
	11			In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.

7.5 Resource: subscriptions

7.5.1 Description

This resource represents subscriptions for notifications from the MEC federator to the MEOs.

7.5.2 Resource definition

Resource URI: {apiRoot}/fed_enablement/v1/subscriptions/

This resource shall support the resource URI variables defined in table 7.5.2-1.

Table 7.5.2-1 Resource URI variables for the resource "subscriptions"

Name	Definition
apiRoot	See clause 7.2

7.5.3 Resource methods

7.5.3.1 GET

The GET method retrieves the information about the subscriptions for the requestor (a MEO). Upon success, the response contains entity body with the list of links to the subscriptions that are present for the requester. This method shall comply with the URI query parameters, request and response data structures, and response codes, as specified in tables 7.5.3.1-1 and 7.5.3.1-2.

Table 7.5.3.1-1 URI query parameters supported by the GET method on this resource

Attribute name	Data type	Cardinality	Description
subscriptionType	String		Query parameter is used to filter a specific subscription type. Permitted values: • system_update_notification_subscription
			[Editor's Note] Need to be updated when a new subscription data type is added to clause 6.3.
systemId	String	01	Identifier of the MEC system.

Table 7.5.3.1-2 Data structures supported by the GET request/response on this resource

Request body	Data type	Cardina lity	Remarks		
body	n/a				
	Data type	Cardina lity	Response codes	Remarks	
	SubscriptionLinkList	1	200 OK	Upon success, a response body containing the list of links to requestor's subscriptions is returned.	
	ProblemDetails	01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request.	
	- HITTERSHITT LINE HARRIST LINE STATE	经验证证明		In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.	
	ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials.	
Response				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.	
body	ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource.	
				More information shall be provided in the "detail" attribute of the "ProblemDetails" structure.	
	ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI.	
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.	
	ProblemDetails	01	406 Not Acceptable	It is used to indicate that the server cannot provide the any of the content formats supported by the client.	
				In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.	

7.5.3.2 PUT

Not supported.

7.5.3.3 PATCH

Not supported.

7.5.3.4 POST

The POST method is used to create a new subscription to MEF. Upon success, the response contains entity body describing the created subscription. This method shall comply with the request and response data structures, and response codes, as specified in the tables 7.5.3.4-1.

Table 7.w1.3.4-1 Data structures supported by POST request/response on this resource

	Data type	Cardinality		Remarks
Request body	{NotificationSu bscription}	1	The request body contains specific subscription data type that is to be created. The option is listed below and defined in clause 6.3.2: SystemUpdateNotificationSubscription	
			[Editor's Note] Need	to be updated when a new subscription data type is
			added to clause 6.3.	
Response body	Data type	Cardinality	Response codes	Remarks



{NotificationSu bscription}	1	201 Created	It is used to indicate that the subscription resource is successfully created.
			The HTTP response includes a "Location" HTTP header that contains the URI of the created resource.
			In the returned NotificationSubscription structure, the created subscription is described using the appropriate data type from the list below and as defined in clause 6.3.2:
			SystemUpdateNotificationSubscription
			[Editor's Note] Need to be updated when a new subscription data type is added to clause 6.3.
ProblemDetails	01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request.
			In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials.
			In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource.
			More information shall be provided in the "detail" attribute of the "ProblemDetails" structure.
ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetails	01	406 Not Acceptable	It is used to indicate that the server cannot provide the any of the content formats supported by the client.
			In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetails	01	415 Unsupported Media Type	It is used to indicate that the server or the client does not support the content type of the entity body.
			In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error
ProblemDetails	01	422 Unprocessable Entity	It is used to indicate that the server understands the content type of the request entity and that the syntax of the request entity is correct but that the server is unable to process the contained instructions. This error condition can occur if an JSON request body is syntactically correct but semantically incorrect, for example if the target area for the request is considered too large. This error condition can also occur if the capabilities required by the request are not supported.
			In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.

7.5.3.5 DELETE

Not supported.

7.6 Resource: existing subscription

7.6.1 Description

This resource represents subscriptions that the client has created to receive the notifications event of the MEC federation.

7.6.2 Resource definition

Resource URI: {apiRoot}/fed_enablement/v1/subscriptions/{subscriptionId}

This resource shall support the resource URI variables defined in table 7.6.2-1.

Table 7.6.2-1 Resource URI variables for the resource

Name	Definition				
apiRoot	See clause 7.2				
	Refers to created subscription, where the MEF assigns a unique resource name among federation members for this subscription. The resource name can also be used to identify the resource.				

7.6.3 Resource methods

7.6.3.1 GET

The GET method retrieves the information about the subscriptions for the requestor. Upon success, the response contains entity body with the data type describing the subscription. This method shall comply with the URI query parameters, request and response data structures, and response codes, as specified in tables 7.6.3.1-1 and 7.6.3.1-2.

Table 7.6.3.1-1 URI query parameters supported by the GET method on this resource

Attribute name	Data type	Cardinality	Description
n/a			

Table 7.6.3.1-2 Data structures supported by the GET request/response on this resource

Request	Data type	Cardina lity	Remarks	
body	n/a			
Response	Data type	Cardina	Response	Remarks
body		lity	codes	

{NotificationSubscrition}	ip 1	200 OK	Upon success, a response body containing data type describing the specific subscription data type is returned. The allowed data type for subscription is defined in clauses 6.3.2 and is as follows: SystemUpdateNotificationSubscription [Editor's Note] Need to be updated when a new subscription data type is added to clause 6.3.
ProblemDetails	01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource. More information shall be provided in the "detail" attribute of the "ProblemDetails" structure.
ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetails	01	406 Not Acceptable	It is used to indicate that the server cannot provide the any of the content formats supported by the client. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.

7.6.3.2 PUT

The PUT method, in this case, has "replace" semantics. Upon success, the target resource is to be updated with the new Data Type received within the message body of the request. This method shall comply with the URI query parameters, request and response data structures, and response codes, as specified in the tables 7.6.3.2-1 and 7.6.3.2-2.

Table 7.6.3.2-1 URI query parameters supported by the PUT method on this resource

Attribute name	Data type	Cardinality	Description
n/a			

Table 7.6.3.2-1 Data structures supported by PUT request/response on this resource

	Data type	Cardinality		Remarks	
	{NotificationSu bscription}	1	The request body contains specific subscription data type that is to be created. The option is listed below and defined in clause 6.3.2: SystemUpdateNotificationSubscription		
			[Editor's Note] Need to be updated when a new subscription data type is		
			added to clause 6.3.		
Response	Data type	Cardinality	Response	Remarks	
body			codes		

{NotificationSubscription}	1	200 OK	Upon success, a response cody containing data type describing the updated subscription is returned. The allowed subscription data type is described using the appropriate data type from the list below and as defined in clause 6.3.2: SystemUpdateNotificationSubscription
			[Editor's Note]Need to be updated when a new subscription data type is added to clause 6.3.
ProblemDetail	S 01	400 Bad Request	It is used to indicate that incorrect parameters were passed in the request. In the returned ProblemDetails structure, the "detail" attribute should convey more information
			about the error.
ProblemDetail	S 01	401 Unauthorized	It is used when the client did not submit credentials.
			In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetail	5 1	403 Forbidden	The operation is not allowed given the current status of the resource.
			More information shall be provided in the "detail"
ProblemDetail	5 01	404 Not Found	attribute of the "ProblemDetails" structure. It is used when a client provided a URI that cannot
			be mapped to a valid resource URI. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetail	5. 01	Acceptable	It is used to indicate that the server cannot provide the any of the content formats supported by the client. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetail	01	412 Precondition Failed	It is used when a condition has failed during conditional requests.
			In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.
ProblemDetail	S 01	422 Unprocessable Entity	It is used to indicate that the server understands the content type of the request entity and that the syntax of the request entity is correct but that the server is unable to process the contained instructions. This error condition can occur if an JSON request body is syntactically correct but semantically incorrect, for example if the target area for the request is considered too large. This error condition can also occur if the capabilities required by the request are not supported. In the returned ProblemDetails structure, the
			"detail" attribute should convey more information about the error.

7.6.3.3 PATCH

Not supported.

7.6.3.4 POST

Not supported.

7.6.3.5 DELETE

The DELETE method is used to cancel the existing subscription. Cancellation can be made by deleting the resource that represents existing subscription. This method shall comply with the URI query parameters, request and response data structures, and response codes, as specified in the tables 7.6.3.5-1 and 7.6.3.5-2.

Table 7.w2.3.5-1 URI query parameters supported by the DELETE method on this resource

Attribute name	Data type	Cardinality	Description
n/a			

Table 7.6.3.5-1 Data structures supported by DELETE request/response on this resource

Request	Data type	Cardinality	Remarks		
body	n/a				
	Data type	Cardinality	Response codes	Remarks	
	n/a	0	204 No Content	Upon success, a response 204 No Content without any response body is returned.	
Response	ProblemDetails	01	401 Unauthorized	It is used when the client did not submit credentials. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.	
body	ProblemDetails	1	403 Forbidden	The operation is not allowed given the current status of the resource. More information shall be provided in the "detail" attribute of the "ProblemDetails" structure.	
	ProblemDetails	01	404 Not Found	It is used when a client provided a URI that cannot be mapped to a valid resource URI. In the returned ProblemDetails structure, the "detail" attribute should convey more information about the error.	

Annex A (informative): Enabling MEC App providers to access MEC federation services

A.1 Introduction

According to ETSI GR MEC 035 [i.2], a "MEC federation is a federated model of MEC systems enabling shared usage of MEC services and applications". This definition is based on the need to standardize features taking into account the GSMA Operator Platform Group (OPG) OP Telco Edge requirements contained in [i.1].

In further detail, in [i.1], a number of interfaces are described, among which:

- 1) the NBI connecting an application provider to an OP instance; and
- 2) the E/WBI connecting two OP instances.

Definitions of these two particular interfaces, as documented in [i.1], need to be considered by ETSI MEC when specifying the federation enablement services. Correspondences of NBI and E/WBI interfaces to MEC federation functional entities and reference points are shown in the exemplary Figure A-1, where it is assumed that each OP instance refers to a federated MEC system and there is no MEFB entity present.

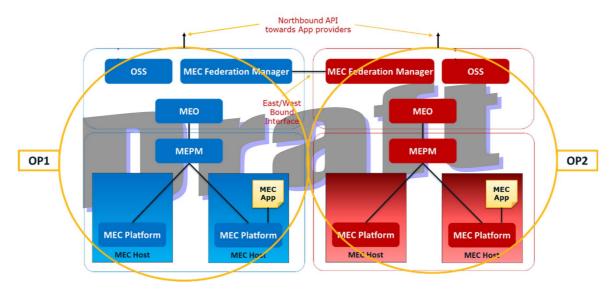


Figure A-1: MEC federation and exemplary correspondence to GSMA OP interfaces NBI and E/WBI [i.1]

NOTE 1: In the context of MEC federation, in the view of an implementation with 5G networks, both ETSI MEC and 3GPP standards should be considered, in a harmonized way.

In this scenario, enablement of MEC App providers to access the MEC federation in an interoperable manner is needed. This would imply the possibility for MEC App providers to offer MEC applications instantiated across the MEC federation, benefiting from all the resources (including MEC services) shared in the MEC federation, according to the authorization policies defined by the multi-party agreements among the business entities forming the MEC federation. In detail, what is needed is enabling an interoperable interface to MEC App providers accessing a MEC federation, with a list of available MEC services. Privacy and security of each MEC system the MEC federation is composed of needs to be ensured, considering that each MEC system which is part of the MEC federation has its own policy and need to expose information, customize access policies and capability to offer customized tools to MEC App providers. The E/WBI interface (along with the NBI interface) is an enabler for the access of MEC federation services by MEC App providers. In particular, the E/WBI enables MEC systems forming a MEC federation to be informed about the MEC App provider's requirement, information initially provided by the MEC App provider to a MEC system of a MEC federation through the NBI interface.

A.2 OP-NBI & OP-E/WBI API mapping to ETSI MEC specifications

A summary of the mapping of OP APIs to ETSI MEC specifications is provided in tables A.2-1 and A.2-2, with respect to the OP NBI and OP E/WBI, respectively.

Table A.2-1: Relationship between OP NBI APIs and ETSI MEC specifications

OP APIs	Description	SDO reference(s)	Stage 2 availability	Stage 3 availability	ETSI MEC corresponding	Comments
					APIs	
Application						
onboarding						
and image						
management.						
Application						
Instance						
Management						
(Resource						
Life-Cycle						
Management)						
Telemetry						
Notifications						
Network						
Events						
Trouble					888	
Ticketing						
Application				123	200 200 200 200 200 200 200 200 200 200	
Resource		THE STATE OF THE S	The state of the s	\$25 \$25 \$25 \$25 \$25 \$25 \$25 \$25 \$25 \$25	20 20 20 20 20 20 20 20 20 20 20 20 20 2	
Catalogue						
Ordering	## ## ## ##	100 64 64 64 64 64 64 64 64 64 64 64 64 64				
Charging				A 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		
Billing						
QoS						
Management						
Traffic						
Influence						
Managing						
Service						
availability in						
LADN						
Application						
relocation						
Confirm User						
Location						

Table A.2-2: Relationship between OP E/WBI APIs and ETSI MEC specifications

OP APIs	Descriptio n	SDO reference(s	Stage 2 availabilit y	Stage 3 availabilit y	ETSI MEC correspondin g APIs	Comment s
Application onboarding						

Application						
Instance						
Management						
(Resource Life-						
Cycle						
Management)						
Telemetry Notifications						
Network Events						
Trouble						
Ticketing						
East/West						
Bound Interface						
Management						
Charging						
Billing						
QoS						
Management						
Traffic						
Influence						
Application						
Resource						
Catalogue						
East/West						
Bound Interface						
Management						
Availability					100	
Zone					医皮肤	
Information	1994				**************************************	
Synchronisation	90 90 90 90 90 90		CONTROL OF THE PARTY OF THE PAR		### ### ### ### ###	
Service						
LBO Roaming			4	***************************************		
(Monitoring)		1-4-10-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1				
LBO Roaming						
(Authentication						
)						
Edge Node						
Sharing						
(resource						
onboarding &						
Management)						
Tranagement)	<u> </u>					

Editor's note: tables A.2-1 and A.2-2 will be populated with content after the joint Workshop with GSMA OPG.

Editor's note: tables A.2-1 and A.2-2 could be also enhanced with relevant information on the 3GPP enablers referenced by ETSI standard, to exemplify the "packaging approach" proposed by ETSI MEC at the joint Workshop with GSMA OPG. This update can be, as well, e.g., part of the outcome of the joint Workshop, if all stakeholders find it convenient as a clarification for the reader.

Annex B (informative): Complementary material for API utilization

To complement the definitions for each method and resource defined in the interface clauses of the present document, ETSI MEC ISG is providing for the Application Mobility Service API a supplementary description file compliant to the OpenAPI Specification [i.7].

In case of discrepancies between the supplementary files and the related data structure definitions in the present document, the data structure definitions take precedence.

The supplementary files, relating to the present document, are located at https://forge.etsi.org/rep/mec/gs040-fed-enablement-api.



Annex C. Data models of EWBI defined by GSMA OPG (informative):

C.1 Introduction

This clause captures the related data models as defined in GSMA PRD OPG.0x [x].

C.2 Interface Management API

The following table summarises the data model supported by the interface management API as defined in clause 3.1.1.7 of the GSMA PRD OPG.04 [x]. It is applicable for Mff Interface Management API in clause 7.x.2.

Table C.2-1 Data model for Interface Management APIs

Data Type	Description	Remarks
Structured Data Types		
offeredAvailabilityZones	Information about the availability zones which the Partner MEC System offers to the Originating System	Defined in clause 3.1.1.7.2.1 of [x]
availabilityZone	The equivalent of an Availability Zone on Public Cloud	Defined in clause 3.1.1.7.2.2 of [x]
edgeDiscoveryServiceEndPoint	End Point information of the Edge Discovery service	Defined in clause 3.1.1.7.2.3 of [x]
mncChangeInfo	The network code update information to notify change in the supported network codes by the Partner MEC System	Defined in clause 3.1.1.7.2.4 of [x]
zoneStatus	Availability status of zones	Defined in clause 3.1.1.7.2.7 of [x]
Enumeration		
objectType	The attribute being updated by the Partner MEC System on existing federation	Defined in clause 3.1.1.7.3.2 of [x]
operationType	THE PERSON NAMED IN COLUMN TO PERSON NAMED I	Defined in clause 3.1.1.7.3.3 of [x]
Status	Hard Carlot Control of	Defined in clause 3.1.1.7.3.4 of [x]

History

Document history				
V3.1.2	2022-12	The first early draft based on ETSI GS MEC 040 v3.0.15.		
V3.1.3	2022-12	Implements documents MEC(22)000432r2 and MEC(22)000481r2.		
V3.1.4	2023-03	Implements documents MEC(22)000613r1, MEC(22)000612r5, MEC(23)000079r1, and MEC(23)000120r1.		

